
Cage assembly

Model #329P, #429P and #C3624T



Pieces

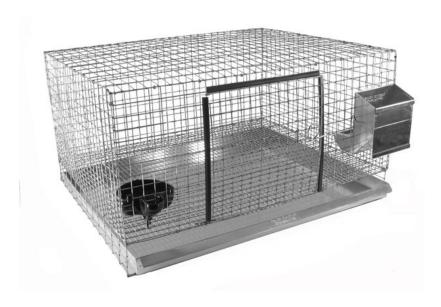

Disassembled cage



Feeder



Pan



Drinker #605P



Clip bag

Installation



1. Remove the pan from the cage.



2. Remove the few clips that hold all the pieces using pointed pliers or cutting pliers.




3. Remove the first piece, which will serve as a roof for the cage.



4. Remove the clip that holds the front of the cage.



5. Open the front and both sides so that they are on the outside.



6. Remove the clip that holds the bag containing the staples needed to mount the cage.



7. Lift up the front and one of the sides and install the staples using round staple pliers, such as models #HP or #601.

Note: Installing the top staple first will help hold the sides in place.



8. Attach the side properly by installing a staple every three inches (7.5 cm).



9. Lift up the other side and install all staples.



10. Remove the clip that holds the back of the cage. It is located underneath the basket that contains the drawer.



11. Raise the back and install staples on both sides.



12. Install a series of staples three inches (7.5 cm) from the bottom to retain the floor.



13. For models with legs, repeat steps 1 to 12 for each of your cages. For other models, go to step 15.



14. Refer to the document for the leg installation (included with the cage) in order to properly install the legs.



15. Install the roof by attaching staples on all sides.



16. Attach the feeder on the front of the cage.



17. Hang the feeder on the front of the cage.



18. Put the drawer back in the cage.

Phone: (450) 799-5170 Fax: (450) 799-5171 info@ranchcunicole.com www.ranchcunicole.com





All our cages are made in Canada

6685 Chemin du Rapide Plat Nord Saint-Hyacinthe, CA J2R 1H5